




優必克科技股份有限公司
UBIQ Technology Co., Ltd.

330 桃園市桃園區大業路一段 18 號 6 樓之 1
6F.-1,NO.18,Sec.1Daye Rd.,Taoyuan Dist,Taoyuan City 330,Taiwan
電話 Tel : 03-331-2677 傳真 Fax : 03-335-7412
e-mail : sales@ubiq.com.tw
Website:www.ubiq.com.tw

塗碳銅箔

■ 塗碳銅箔 (單面塗碳)

型號：**CCF-254S**

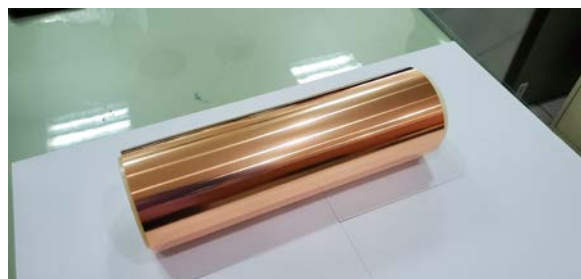

規格:

導電碳塗層 Conductive carbon coating	單面塗碳，單面各塗厚約 0.7um Single side coating with 0.7um thickness each side
塗層面密度 Coating density	0.75g/m ²
表面電阻率 Surface resistivity	0.7Ω/sq
銅箔純度 Copper Purity	≥ 99.9%
銅箔厚度 Copper Thickness	8 um
塗層寬度 Coating Width	254 mm
總寬度 Total Width	297 mm
總厚度 Total Thickness	8.7 um
長度 Length	40 米/捲



優必克科技股份有限公司
UBIQ Technology Co., Ltd.


330 桃園市桃園區大業路一段 18 號 6 樓之 1
6F.-1,NO.18,Sec.1Daye Rd.,Taoyuan Dist,Taoyuan City 330,Taiwan
電話 Tel : 03-331-2677 傳真 Fax : 03-335-7412
e-mail : sales@ubiq.com.tw
Website : www.ubiq.com.tw

Carbon Coated Copper foil

■ Carbon Coated Copper foil

(Single-sided)

Product Model : CCF-254S

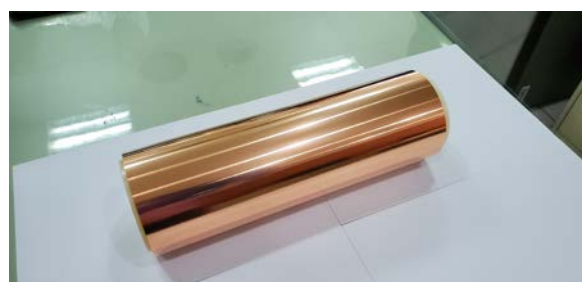

Specification:

Conductive carbon coating	Single side coating with 0.7um thickness each side
Coating density	0.75g/m ²
Surface resistivity	0.7Ω/sq
Copper Purity	≥ 99.9%
Copper Thickness	8 um
Coating Width	254 mm
Total Width	297 mm
Total Thickness	8.7 um
Length	40M/roll